东莞市安都电子有限公司

Dongguan Andu Electronic CO.,LTD

產 品 規 格 承 認 書

SPECIFICATION FOR APPROVAL

客 戶 名 稱 CUSTOMER	
產 品 名 稱 PRODUCT NAME	**大号叉栓保险丝 8.5孔径**
型 號 規 格 MODEL DETAIL	
承 认 日 期 APPROVAL DATE	

編制	經理	業務
PREPARED	MANAGER	OPERATION
袁 武	谢德贵	


承認	審核	批准
SIGNATURE	CHECKED BY	APPROVAL BY

備註:承認簽章後請回復一份承認書(或影本)給我們,其餘的您們留作存檔。如果在簽章的承認（或影本）回復給我們之前，下了有關此零件的訂單且又無特別說明，那麼我們就確定您們已完全承認了。

Please return one specification or one copy of it with your chop and signature of approval and retain the others for your record. In the event of an order being placed for this part number before the chop and signed with specification (or copy) is returned and without special explanation, it will be assumed that full approval have been given.

一，尺寸公差：±0.3mm



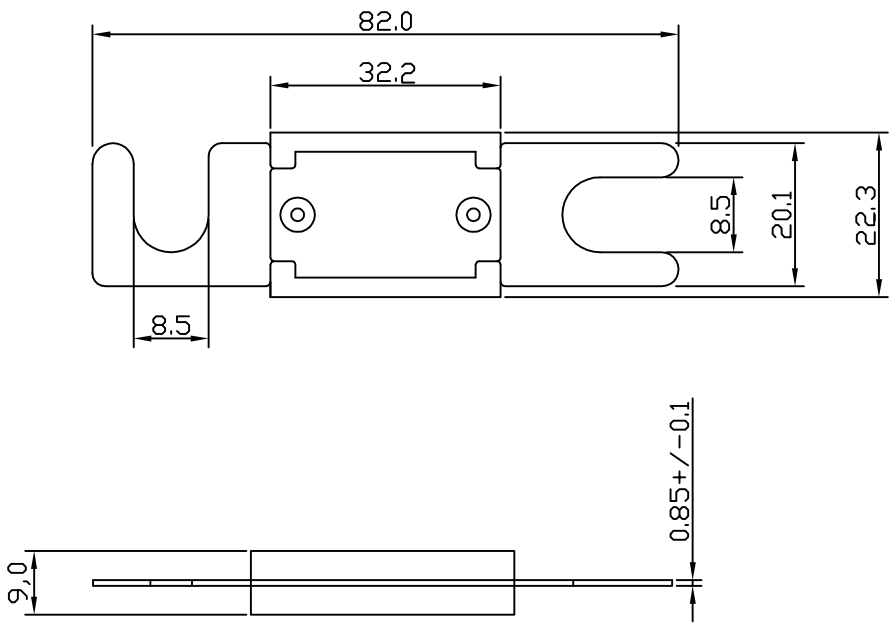

二，基本参数

NOTES: UNLESS OTHERWISE SPECIFIED.

1. the fuses shown are for in motor vehicles, boats and trailers to protect electrical wiring and vehicles.This standard is for the construction shown and is not intended to restrict the design and use of other configurations and materials capable of meeting the vehicle requirements.
2. A fuse is a device designed to interrupt the electrical circuiut when subjected to overcents. This action is to be nonreversible and the fuse is intended to be replaced after the circuit, malfunction has been corrected.
   capable of meeting the vehicle requirements.
3. Functional Characteristics


TESTING CURRENT	BLOW TIME LIMIT
150% (Rating <225A)	1Hr. minimum
160% (Rating >225A)	60seconds minimum
220%	60seconds Max
250%	0.8sec-10sec
400%	0.2sec-2sec

4. Standard: DIN43560/1;

二，基本参数

15	32V/48V/72V/125V	400A	ADL-B400
14	32V/48V/72V/125V	350A	ADL-B350
13	32V/48V/72V/125V	300A	ADL-B300
12	32V/48V/72V/125V	250A	ADL-B250
11	32V/48V/72V/125V	200A	ADL-B200
10	32V/48V/72V/125V	175A	ADL-B175
9	32V/48V/72V/125V	150A	ADL-B150
8	32V/48V/72V/125V	125A	ADL-B125
7	32V/48V/72V/125V	100A	ADL-B100
6	32V/48V/72V/125V	80A	ADL-B80
5	32V/48V/72V/125V	70A	ADL-B70
4	32V/48V/72V/125V	60A	ADL-B60
3	32V/48V/72V/125V	50A	ADL-B50
2	32V/48V/72V/125V	40A	ADL-B40
1	32V/48V/72V/125V	30A	ADL-B30

二，基本参数

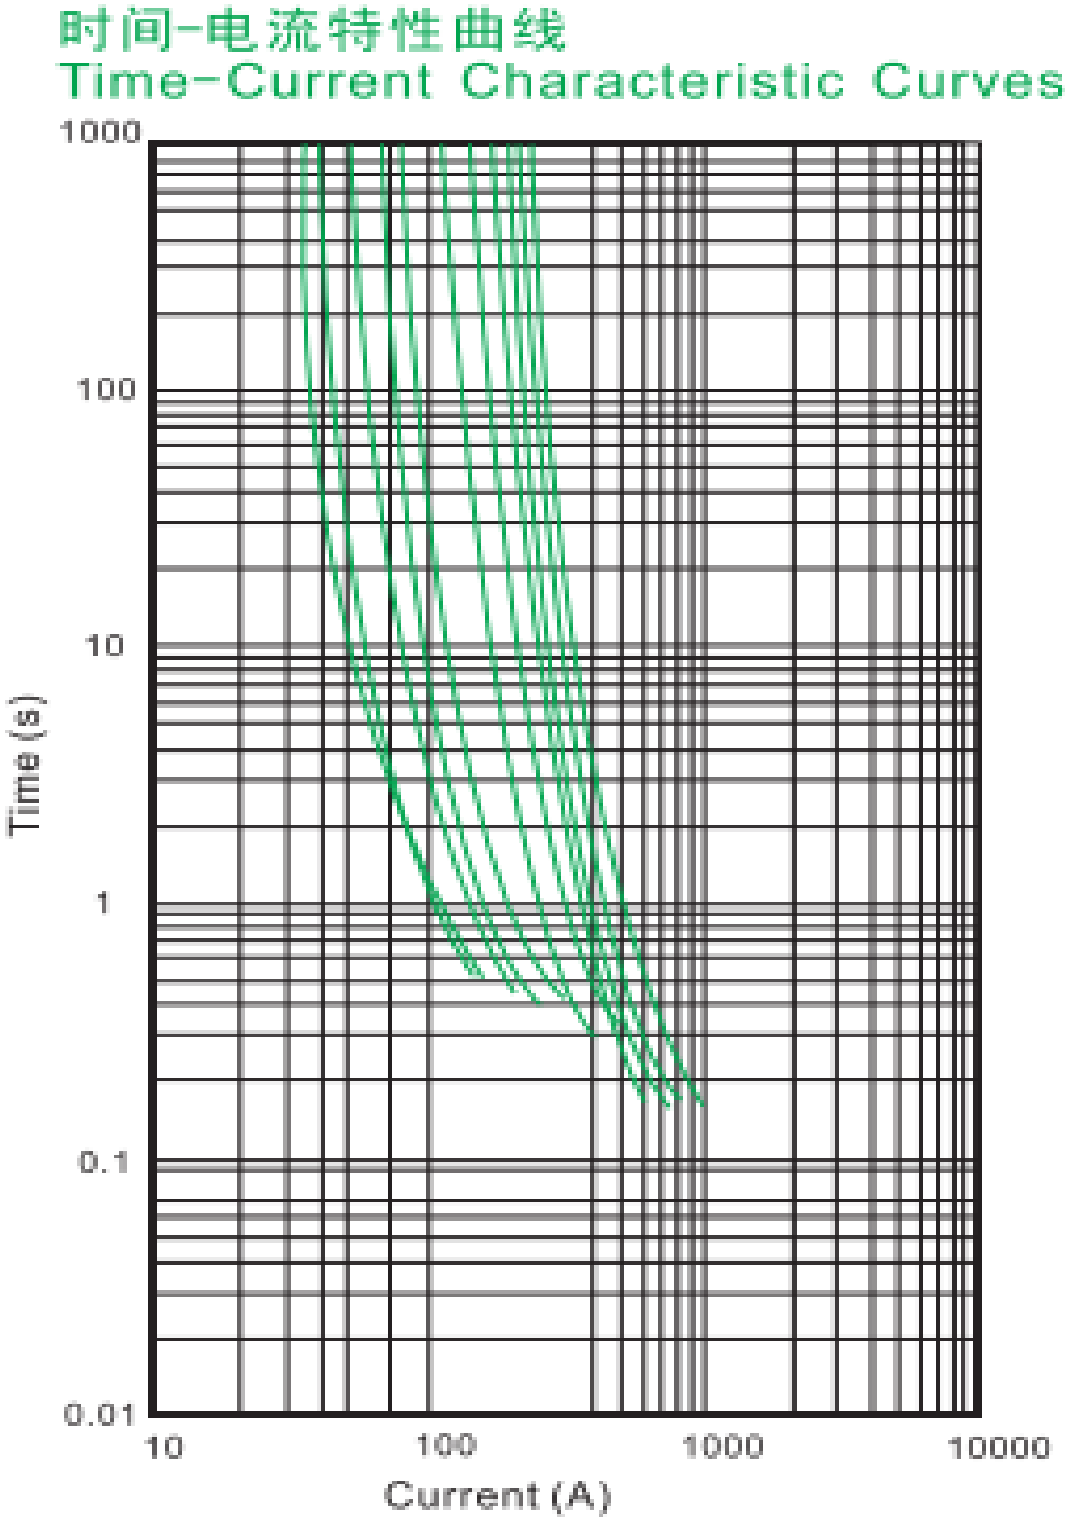
时间-电流特性曲线
Time-Current Characteristic Curves
1000
100
10
1
0.1
0.01
Time (s)
10
100
1000
10000
Current (A)

三，包装方式

1小袋子包装10PCS
(备注：内装1PCS干燥剂)



小箱子包装200PCS
（20包小袋子）



内装5箱小箱子

大箱子包装1000PCS
（5PCS小箱子）



